
KLEIDCO®

ALUMINUM WINDOWS & DOORS

Icon 84 HI

Thermally insulated aluminum windows and doors for commercial, multifamily and residential building envelopes.

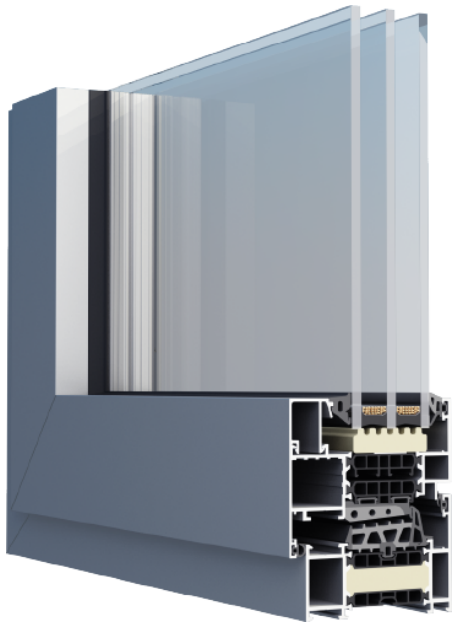

SYSTEM HIGHLIGHTS

- Thermally insulated frame and vent
- Project-specific opening configurations
- Integration with other envelope elements

PROFILE DIMENSIONS

Frame depth	3¼″
Vent depth	3⅝″
Maximum glazing	2⅜″
Frame thermal insulation	1⅞″

PUBLISHED PERFORMANCE

Air infiltration	ASTM E283	<0.1 cfm/ft² At 6.24 psf
Water resistance	ASTM E331	+12 psf
Wind load	ASTM E330	±40 / ±60 psf
U-factor	NFRC	0.193 Btu/(h·ft²·°F)
SHGC	NFRC	0.25-0.40

Published values depend on assembly, size, glazing and hardware; they are not a blanket rating for the product family.

LET'S PLAN YOUR PROJECT

System selection · Profile sections · Project-specific documentation

usa@kleidco.com