
uPVC WINDOWS & DOORS

Selective 76

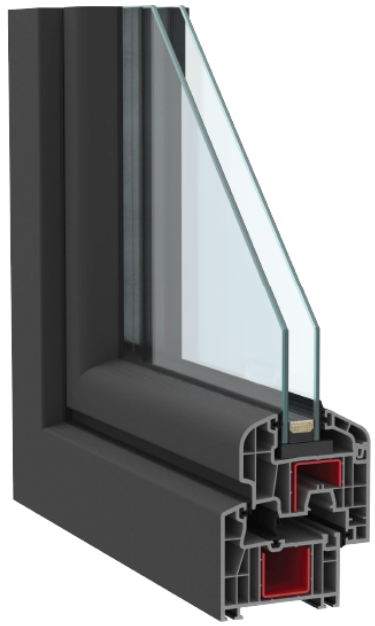

Six-chamber uPVC windows and doors for residential and commercial applications requiring thermal insulation and finish flexibility.

SYSTEM HIGHLIGHTS

- Six-chamber frame
- SLP foam, SLA aluminum-cap and SLB bonded variants
- Laminated finish options; aluminum-cap finishes depend on configuration

PROFILE DETAILS

Frame depth	3″
Frame chambers	6

PUBLISHED PERFORMANCE

Frame Uf	0.92 W/(m²·K)
Window Uw	0.80 W/(m²·K)
Air permeability EN 12207	Class 4
Water tightness EN 12208	Class 9A
Wind resistance	Class C4 / B4

Published values depend on assembly, size, glazing and hardware; they are not a blanket rating for the product family.

LET'S PLAN YOUR PROJECT

System selection · Profile sections · Project-specific documentation

usa@kleidco.com